




Please type a plus sign (+) inside this box → ☐Approved for use through 9/30/00. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

<b>UTILITY PATENT APPLICATION TRANSMITTAL</b>		Attorney Docket No. _____																					
First Named Inventor or Application Identifier <b>Emile E. Abi-Habib and Steve Froeliche</b>		Title <b>WASHING MACHINE BRAKE CAM ACTUATOR WITH INTERRUPTED RING</b>																					
		Express Mail Label No. <b>EL319796448US</b>																					
APPLICATION ELEMENTS <small>See MPEP chapter 600 concerning utility patent application contents.</small>		ADDRESS TO: <b>Assistant Commissioner for Patents Box Patent Application Washington, DC 20231</b>																					
<div style="display: flex; justify-content: space-between;"><div style="width: 45%;"><p>1. <input checked="" type="checkbox"/> Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original, and a duplicate for fee processing)</p><p>2. <input checked="" type="checkbox"/> Specification [Total Pages <b>10</b>] (Preferred arrangement set forth below) - Descriptive title of the Invention - Cross References to Related Applications - Statement Regarding Fed sponsored R &amp; D - Reference to Microfiche Appendix - Background of the Invention - Brief Summary of the Invention - Brief Description of the Drawings (if filed) - Detailed Description - Claim(s) - Abstract of the Disclosure</p><p><input checked="" type="checkbox"/> Drawing(s) (35 USC 113) [Total Sheets <b>4</b>]</p><p>Oath or Declaration [Total Pages _____]</p><p>a. <input type="checkbox"/> Newly executed (original or copy)</p><p>b. <input type="checkbox"/> Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed) [Note Box 5 below]</p><p>i. <input type="checkbox"/> <u>DELETION OF INVENTOR(S)</u> Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).</p><p><input type="checkbox"/> Incorporation by Reference (useable if Box 4b is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.</p></div><div style="width: 45%;"><p>6. <input type="checkbox"/> Microfiche Computer Program (Appendix)</p><p>7. Nucleotide and/or Amino Acid Sequence Submission (If applicable, all necessary)</p><p>a. <input type="checkbox"/> Computer Readable Copy</p><p>b. <input type="checkbox"/> Paper Copy (identical to computer copy)</p><p>c. <input type="checkbox"/> Statement verifying identity of above copies</p></div></div>																							
<b>ACCOMPANYING APPLICATION PARTS</b>																							
<div style="display: flex; justify-content: space-between;"><div style="width: 45%;"><p>8. <input type="checkbox"/> Assignment Papers (cover sheet &amp; document(s))</p><p>9. <input type="checkbox"/> 37 CFR 3.73(b) Statement (when there is an assignee) <input type="checkbox"/> Power of Attorney</p><p>10. <input type="checkbox"/> English Translation Document (if applicable)</p><p>11. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations</p><p>12. <input type="checkbox"/> Preliminary Amendment</p><p>13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized)</p><p>14. <input type="checkbox"/> Small Entity Statement(s) (PTO/SB/09-12) <input type="checkbox"/> Statement filed in prior application, Status still proper and desired</p><p>15. <input type="checkbox"/> Certified Copy of Priority Document(s) (If foreign priority is claimed)</p><p>16. <input checked="" type="checkbox"/> Other: Certificate of Express Mail Declaration and Power of Attorney (submitted for identification purposes only)</p></div><div style="width: 45%; font-size: small;"><p>*NOTE FOR ITEMS 1 &amp; 14: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. §1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. §1.28).</p></div></div>																							
17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:																							
<div style="display: flex; justify-content: space-between;"><div><input type="checkbox"/> Continuation <small>Prior application information</small></div><div><input type="checkbox"/> Divisional <small>Examiner</small></div><div><input type="checkbox"/> Continuation-in-part (CIP) <small>Group/Art Unit</small></div><div>of prior application No _____</div></div>																							
<b>18. CORRESPONDENCE ADDRESS</b>																							
<div style="display: flex; justify-content: space-between;"><div><input type="checkbox"/> Customer Number or Bar Code Label</div><div style="border: 1px dashed black; padding: 5px; flex-grow: 1;">(Insert Customer No. or Attach bar code label here)</div><div><input checked="" type="checkbox"/> Correspondence address below</div></div>																							
<table border="1" style="width: 100%; border-collapse: collapse;"><tr><td colspan="2">NAME</td><td colspan="2">John S. Beulick</td></tr><tr><td colspan="2">ADDRESS</td><td colspan="2">Armstrong Teasdale LLP. One Metropolitan Square, Suite 2600</td></tr><tr><td>CITY</td><td>St. Louis</td><td>STATE</td><td>MO</td></tr><tr><td>COUNTRY</td><td>USA</td><td>TELEPHONE</td><td>314-621-5070</td></tr><tr><td></td><td></td><td>FAX</td><td>314-621-5065</td></tr></table>				NAME		John S. Beulick		ADDRESS		Armstrong Teasdale LLP. One Metropolitan Square, Suite 2600		CITY	St. Louis	STATE	MO	COUNTRY	USA	TELEPHONE	314-621-5070			FAX	314-621-5065
NAME		John S. Beulick																					
ADDRESS		Armstrong Teasdale LLP. One Metropolitan Square, Suite 2600																					
CITY	St. Louis	STATE	MO																				
COUNTRY	USA	TELEPHONE	314-621-5070																				
		FAX	314-621-5065																				
<table border="1" style="width: 100%; border-collapse: collapse;"><tr><td>Name (Print/type)</td><td>Bruce T. Atkins</td><td>Registration No. (Attorney/Agent)</td><td>43,476</td></tr><tr><td>Signature</td><td></td><td>Date</td><td>October 4, 1999</td></tr></table>				Name (Print/type)	Bruce T. Atkins	Registration No. (Attorney/Agent)	43,476	Signature		Date	October 4, 1999												
Name (Print/type)	Bruce T. Atkins	Registration No. (Attorney/Agent)	43,476																				
Signature		Date	October 4, 1999																				

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Office, Patent and trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

WASHING MACHINE BRAKE CAM ACTUATOR  
WITH INTERRUPTED RING

BACKGROUND OF THE INVENTION

This invention relates generally to drive assemblies for washing machines, and, more particularly, to a brake cam actuator assembly for reducing noise in an agitate cycle of a washing machine.

One type of washing machine includes a wrap spring clutch that couples a brake cam actuator to a rotationally driven transmission pulley hub to execute an agitate portion of a washing machine cycle. See, for example, U.S. Patent No. 4,283,928. The brake cam actuator operates to engage or disengage a brake that either prevents or allows, respectively, rotation of a clothes basket inside the machine. This particular construction, however, has proven disadvantageous in at least two aspects.

First, the assembly is susceptible to imperfections in the ends of the transmission pulley hub and brake cam actuator that are interfaced within the wrap spring clutch. Burrs and other imperfections on the surfaces may interfere as the transmission pulley hub and brake cam actuator are rotated with respect to one another, causing a high incidence of knocking noise in the agitate portion of a washer cycle. Factory rework of such machines and customer returns of defective units are contributing to an increased manufacturing cost of the machines.

Second, the brake cam actuator and transmission pulley hub typically form a sealing surface. Normal or expected fluid leaks, such as oil leaks, cannot penetrate the seal and therefore flow toward an opposite end of the brake cam actuator body and contaminate a cam surface of the brake cam actuator. Oil migrating from the cam surface of the brake cam actuator can further contaminate the friction brake surface. The contamination adversely affects operation of the brake, causing the brake to stick and/or slip, and producing squeaking noises in the agitate portion of the machine cycle.

Accordingly, it would be desirable to provide a brake cam actuator assembly that is not as sensitive to imperfections in the interfacing surfaces of the transmission pulley hub and the brake cam actuator and that reduces knocking noise in the agitate portion of a machine cycle. It would also be desirable to provide a brake

cam actuator assembly that avoids contamination of the brake cam actuator cam surface friction material to prevent squeaking noise during the agitate portion of the machine cycle.

#### BRIEF SUMMARY OF THE INVENTION

In an exemplary embodiment of the invention, a brake cam actuator for a washing machine includes a cylindrical cam actuator body having first and second ends, and a ring attached to the first end that includes a plurality of segments separated from one another. More specifically, three equal arc segments extend about 95 rotational degrees around a circumference of the brake cam actuator first end. The arc segments are approximately equally spaced, and therefore separated from one another by about 25 rotational degrees around a circumference of the brake cam actuator first end.

The ring segments form a bearing surface that separate an end surface of a transmission pulley hub and a surface of the actuator body first end. The dimensions of the ring segments allow for an increased tolerance of edge imperfections and damage to the interfacing end of the transmission pulley hub and the brake cam actuator first end. Thus, instances of unacceptable knocking noise are reduced, and the ensuing factory reworks and customer returns are reduced accordingly.

The separation between the ring segments forms controlled flow paths for minor oil leaks to an outside surface of the cam actuator body. Therefore, contamination of the brake cam actuator bearing surface and the brake surface from minor oil leaks flowing to the second end is avoided. Consequently, the resultant squeaking noise from sticking and slipping of a brake is reduced.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a side view of a washing machine partially broken away;

Figure 2 is a schematic illustration of a brake cam actuator assembly including a brake cam actuator;

Figure 3 is a top plan view of the brake cam actuator shown in Figure 2;

Figure 4 is a cross sectional view of Figure 3 taken along line 4-4;

Figure 5 is a magnified view of a portion of the brake cam actuator shown in Figure 3; and

Figure 6 is a bottom plan view of the brake cam actuator shown in Figure 1.

## DETAILED DESCRIPTION OF THE INVENTION

Figure 1 is a partially broken away view of a conventional washing machine 10, the construction and operation of which is well known in the art, and in which the present invention may be practiced. Washing machine 10 includes a cabinet housing 12 including an outer tub 14 adapted to be filled with wash water or rinse water through a fill tube 16 in response to manipulation of controls 18 located on a control panel 20 for user selection of desired machine cycles.

A clothes basket 22 is mounted within outer tub 14 and clothes disposed in clothes basket 22 are subjected to washing action by an oscillating agitator 24 located within clothes basket 22 during a wash or rinse cycle after introduction of water into outer tub 14. After each wash or rinse cycle agitation, clothes basket 22 is rotated at high speed in order to extract water from the clothes. The water is drained into a sump (not shown), and pumped to a drain 26 by a pump assembly 28.

Agitator 24 and clothes basket 22 are driven by a single reversible electric drive motor 30 through a clutch 32 and a pulley system 34. Drive motor 30 drives a centrifugally actuated wrap spring clutch (not shown) drivingly connected to a transmission 36. Transmission 36 is normally braked by a spring applied disk brake 38 engaged by a brake cam actuator assembly 40 so that agitator 24 rotates while clothes basket 22 remains stationary. A transmission pulley hub 42 is coupled to pulley system 34 and interfaces with a brake cam actuator (not shown) and a brake cam actuator assembly wrap spring clutch (not shown) circumscribing the brake cam actuator and drivingly coupling transmission pulley hub 42 and the brake cam actuator to operate disk brake 38.

When drive motor 30 rotates transmission pulley hub 42 in a first direction, transmission 36 actuates agitator 24 to oscillate while brake cam actuator assembly engages disk brake to prevent clothes basket 22 from rotating. When drive motor 30 is reversed to rotate transmission pulley hub 42 in a second direction,

transmission pulley hub 42 and the wrap spring clutch lock on the brake cam actuator and cause disk brake 38 to be released so that transmission pulley hub 42 spins transmission 36 coupled to clothes basket 22. Whenever clothes basket 22 is to be rotated for centrifugal extraction of liquid from clothes in clothes basket 22, brake cam actuator assembly 40 releases disk brake 38, allowing agitator 24 and clothes basket 22 to spin together.

Figure 2 is a schematic illustration of brake cam actuator assembly 40 including brake cam actuator 44, transmission pulley hub 42, and a wrap spring clutch 46. Brake cam actuator 44 includes a cylindrical body 50 having a first end 52 that interfaces with a transmission pulley hub end 54, and a second end 56 that forms a cam surface 58. A ring 60 is disposed between transmission pulley hub 42 and a first end surface 62 and is attached to brake cam actuator first end 52. Ring 60 is exaggerated in Figure 2 to better illustrate the dual purpose of ring 60. First, ring 60 separates brake cam actuator first end surface 62 and transmission pulley hub end 54. Second, ring 60 forms a bearing surface 64 for transmission pulley hub end 54.

Wrap spring clutch 46 provides one-way engagement of transmission pulley hub 42 and brake cam actuator 44. When transmission pulley hub 42 is rotated clockwise, wrap spring clutch 46 engages an outer surface 66 of brake cam actuator body 50 and causes brake cam actuator 44 to rotate. When brake cam actuator 44 rotates, brake cam actuator second end cam surface 58 pushes upward and releases disk brake 38 (shown in Figure 1), thereby allowing clothes basket 22 (shown in Figure 1) to rotate with agitator 24 (shown in Figure 1). When the rotation of transmission pulley hub 42 is reversed, i.e., when transmission pulley hub 42 is rotated counterclockwise by drive motor 30 (shown in Figure 1), wrap spring clutch 46 slips on brake cam actuator outer surface 66 and a set of springs (not shown) pushes brake cam actuator 44 downward and engages disk brake 38 to prevent rotation of clothes basket 22 while agitator 24 rotates.

Figure 3 is a top plan view of brake cam actuator second end 56, including a plurality of ramped cam pockets 80 equally spaced around brake cam actuator cam surface 58 between spherical stops 82 for receiving ball bearings (not shown). A plurality of rotary stops 84 are positioned around an outer periphery 86 to limit the rotation of brake cam actuator 38 relative to disk brake 38 (shown in Figure 1). A central aperture 88 is dimensioned for receiving and engaging transmission pulley hub 42. In operation, transmission pulley hub 42 drives brake cam actuator 44

through wrap spring clutch 46 (shown in Figures 1 and 2) in a clockwise direction, pushing the ball bearings upward in ramped pockets 80 and releasing disk brake 38 (shown in Figure 1). When the rotation of transmission pulley hub 42 is reversed, wrap spring clutch 46 slips on brake cam actuator body outer surface 66 and a spring (not shown) pushes the bearings downward in ramp pockets 80 and engages disk brake 38.

Figure 4 is a cross sectional view of brake cam actuator 44 along line 4-4 illustrating spherical ramped pockets 80 on brake cam actuator second end 56, and ring 60 on brake cam actuator first end 52, details of which are magnified in Figure 5.

As shown in Figure 5, ring 60 extends a distance H above brake cam actuator first end surface 62 and spans a radial distance W along brake cam actuator first end surface 62. Ring 60 extends between an inner edge 100 and an outer edge 102 of brake cam actuator body 50, and generally comprises two arcuate portions 104 extending from brake cam actuator first end surface 62 and joining a substantially flat bearing surface 64 for abutment with transmission pulley hub 42 (shown in Figures 1 and 2). In a particular embodiment, H is approximately 0.008 inches, W is approximately 0.04 inches, and arcuate portions 104 have a radius of approximately 0.02 inches. In a further particular embodiment, ring 60 is integrally formed with brake cam actuator body 50 and is fabricated from iron nickel sintered metal. Also, as shown in Figure 5, brake cam actuator outer edge 102 is slightly tapered relative to brake cam actuator inner edge 100.

Figure 6 is a bottom plan view of brake cam actuator 44 illustrating ring 60 that includes a plurality of arc segments 110. Specifically, three equal arc segments 110 each span about 95 degrees of rotation around a circumference 112 of brake cam actuator first end 52, and are spaced from one another by about 25 degrees of rotation around circumference 112 of brake cam actuator first end 52. While arc segments 110 are equally sized and spaced as shown, it is contemplated that more or less segments, including linear segments, of varying size and shape could be employed within the scope of the instant invention.

In operation, ring bearing surface 64 contacts driven transmission pulley hub end 54 (shown in Figures 2), thereby separating brake cam actuator first end surface 62 and decreasing the impact of imperfections and manufacturing defects in transmission pulley hub end 54 and brake cam actuator first end 52. Knocking

noise from interfering imperfections on brake cam actuator first end 52 and transmission pulley hub end 54 is accordingly reduced.

Furthermore, separations 114 between ring segments 110 form controlled flow paths for normal oil leaks that allow oil to escape through the separations to brake cam actuator body outer surface 66. Consequently, oil does not flow into brake cam actuator second end 56 where it may contaminate cam surface 58 that may causes disk brake 38 (shown in Figure 1) to stick and/or slip and produce squeaking noises during the agitate cycle of the machine.

Thus, a brake cam actuator assembly 40 is provided that is not as sensitive to imperfections in the interfacing surfaces of transmission pulley hub 42 and brake cam actuator 44 and that reduces knocking noise in the agitate portion of a machine cycle. Moreover, oil contamination of ramp areas in brake cam actuator second end 56 is avoided, and squeaking noise due to slipping and sticking of brake cam actuator 38 is reduced.

While the invention has been described in terms of various specific embodiments, those skilled in the art will recognize that the invention can be practiced with modification within the spirit and scope of the claims.

## WHAT IS CLAIMED IS:

1. A method for reducing noise in an agitate cycle of a washing machine, the washing machine including a brake cam actuator including a cylindrical body having first and second ends, a transmission pulley hub for driving engagement of said cam, and a wrap spring clutch circumscribing the transmission pulley hub and the brake actuator body for coupling rotation of the transmission pulley hub to the brake cam actuator body in at least one rotational direction, said method comprising the steps of:

forming a segmented ring on the first end of the cam actuator body, the ring comprising a plurality of arc segments separated from one another around a circumference of the first end, thereby increasing a tolerance of imperfections of the first end and forming controlled leak paths for minor oil leaks, directing oil away from the second end of the brake cam actuator; and

assembling the transmission pulley hub, brake cam actuator and wrap spring clutch.

2. A method in accordance with Claim 1 wherein said step of forming the segmented ring comprises the step of integrally molding the brake cam actuator body and the ring.

3. A brake cam actuator for a washing machine, comprising:

a cylindrical cam actuator body comprising first and second ends; and

a ring attached to said first end, said ring comprising a plurality of segments.

4. A brake cam actuator in accordance with Claim 3 wherein said plurality of segments comprise equally spaced arcs.

5. A brake cam actuator in accordance with Claim 4 wherein said plurality of rings are spaced about 25° from one another around a circumference of said first end.

6. A brake cam actuator in accordance with Claim 3 wherein said plurality of segments are equal in length.



7. A brake cam actuator in accordance with Claim 6 wherein said segments extend about 95 rotational degrees around a circumference of said first end.

8. A brake cam actuator in accordance with Claim 3 wherein said plurality of segments comprises three segments.

5 9. A brake cam actuator in accordance with Claim 3 wherein said ring is integral with said body.

10. A brake cam actuator in accordance with Claim 3 wherein said segments form a bearing surface.

10 11. A brake cam actuator in accordance with Claim 3 wherein said body is tapered.

12. A brake cam actuator assembly, comprising:

a brake cam actuator comprising a body comprising first and second ends, said first end comprising a segmented ring;

15 a transmission pulley hub for driving said brake cam actuator first end, said segmented ring forming a bearing surface for said transmission pulley hub; and

a wrap spring clutch circumscribing said body and said hub for driving engagement of said pulley and said hub in a first rotational direction, and for slipping engagement between said pulley and said hub in a second rotational direction.

20 13. A brake cam actuator assembly in accordance with Claim 12 wherein said first rotational direction is clockwise.

14. A brake cam actuator assembly in accordance with Claim 12 wherein said segmented ring comprises a plurality of substantially equal arc segments.

25 15. A brake cam actuator assembly in accordance with Claim 14 wherein said arc segments extend about 95 rotational degrees around a circumference of said first end.

16. A brake cam actuator assembly in accordance with Claim 15 wherein said arc segments are equally spaced from one another.

17. A brake cam actuator assembly in accordance with Claim 12 wherein said ring is integrally formed with said body.

18. A brake cam actuator assembly in accordance with Claim 12 wherein said second surface comprises a plurality of ramps.

5 19. A brake cam actuator assembly in accordance with Claim 12 wherein said body is tapered.


20. A brake cam actuator assembly in accordance with Claim 12 wherein said segmented ring comprises three arc segments separated from one another by about 25 rotational degrees around a circumference of said first end.

## WASHING MACHINE BRAKE CAM ACTUATOR WITH INTERRUPTED RING

### ABSTRACT OF THE DISCLOSURE

A brake cam actuator assembly for a washing machine includes an actuator having a cylindrical body that is drivingly coupled to a transmission pulley hub through a wrap spring clutch circumscribing the transmission pulley hub and brake cam actuator body. A first end of the brake cam actuator includes a segmented ring that reduces knocking noises due to imperfections and manufacturing defects in the transmission pulley hub and brake cam actuator first end which interface one another. The segmented ring also forms controlled flow path for normal fluid leaks and prevents contamination of a ramped cam surface on a second end of brake cam actuator and contamination of a friction brake surface that may produce friction material squeaking noises.

FIG. 1

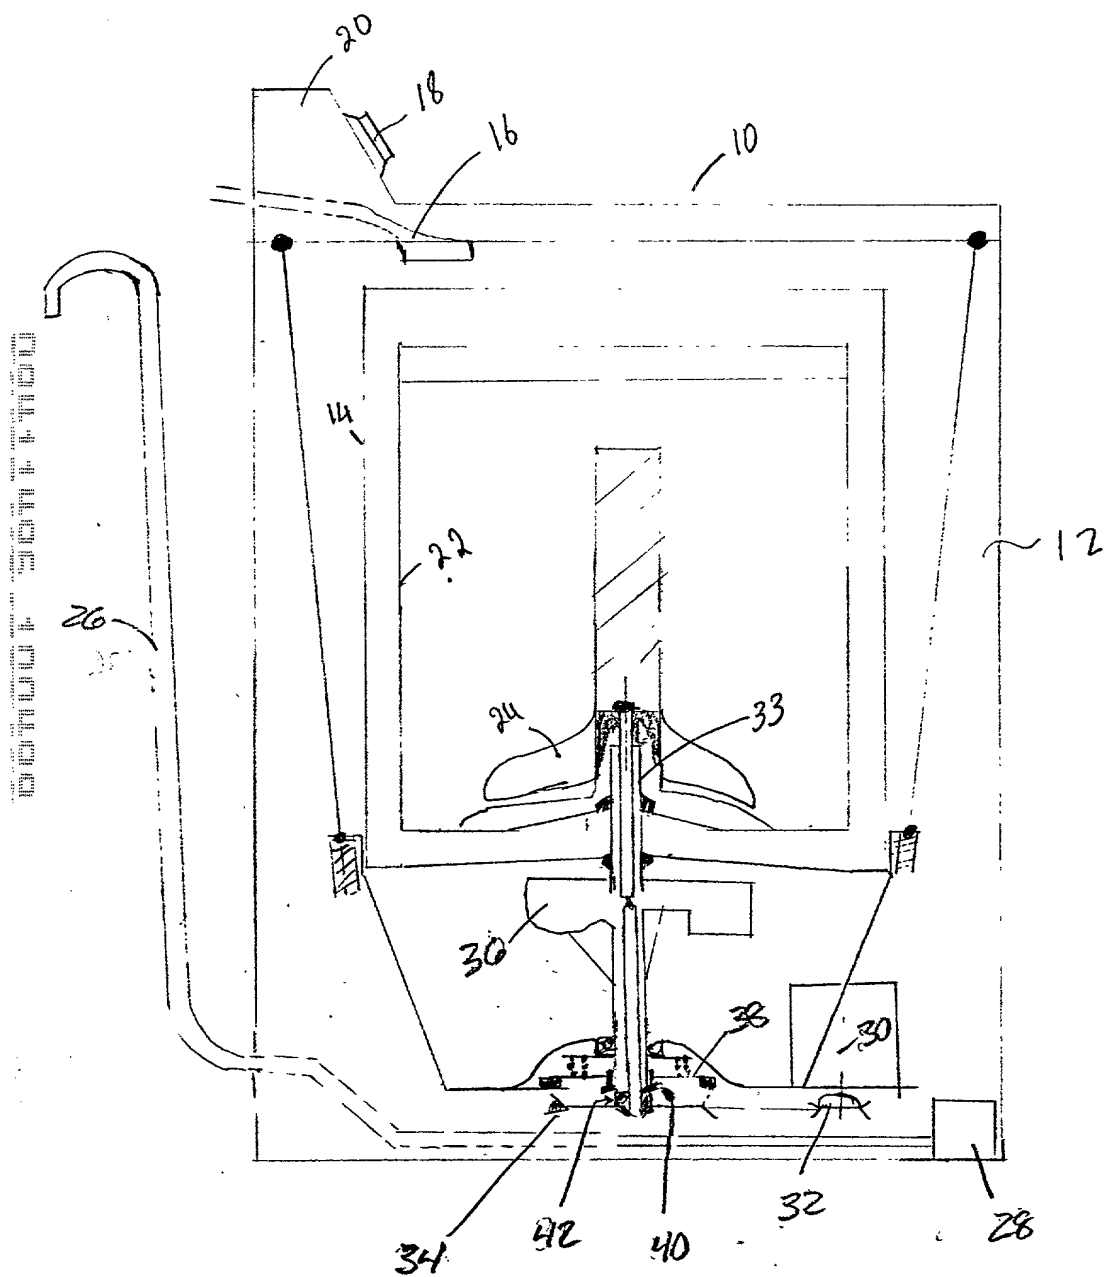

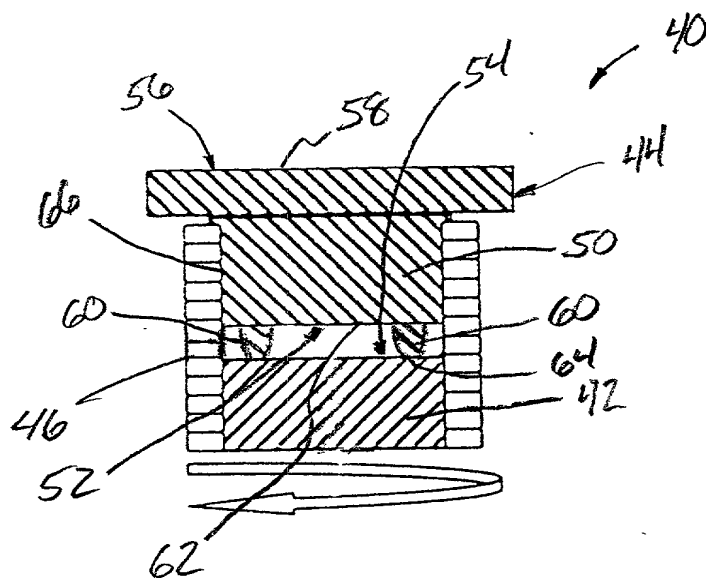


FIG. 2

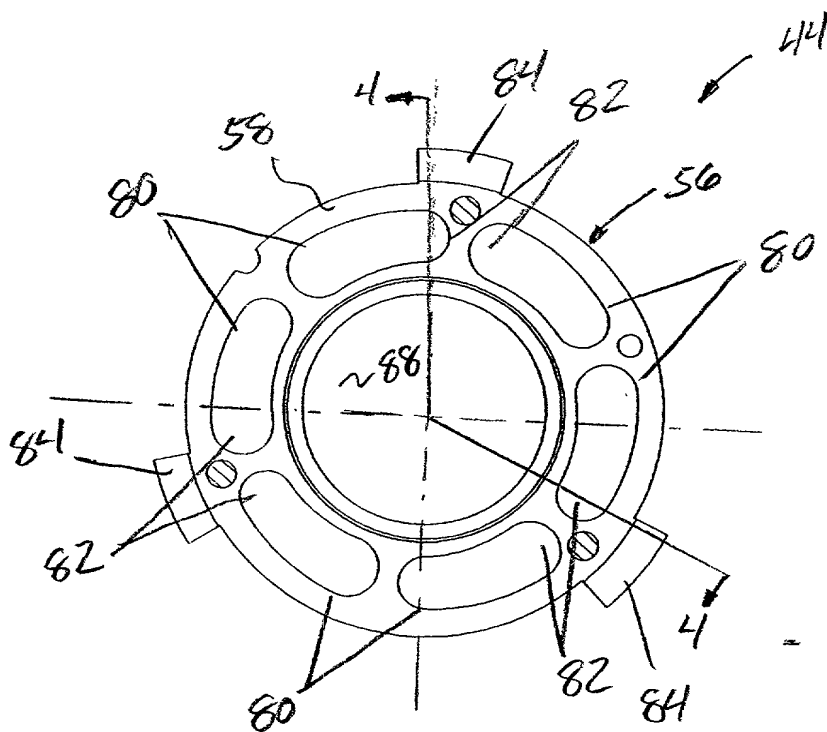


FIG. 3

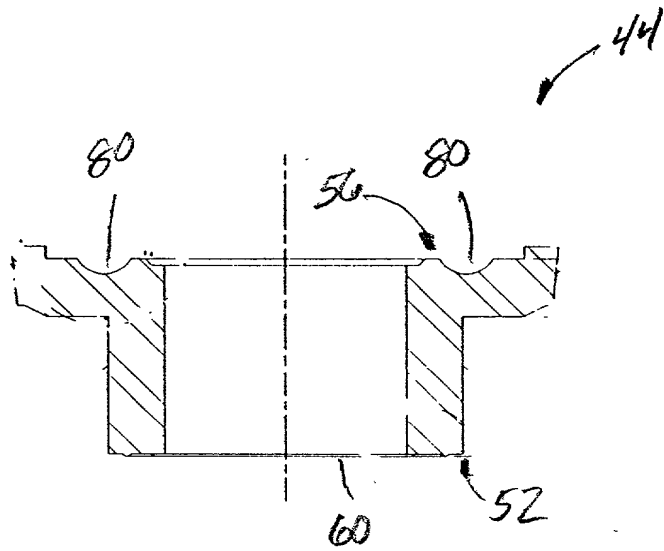


FIG. 4

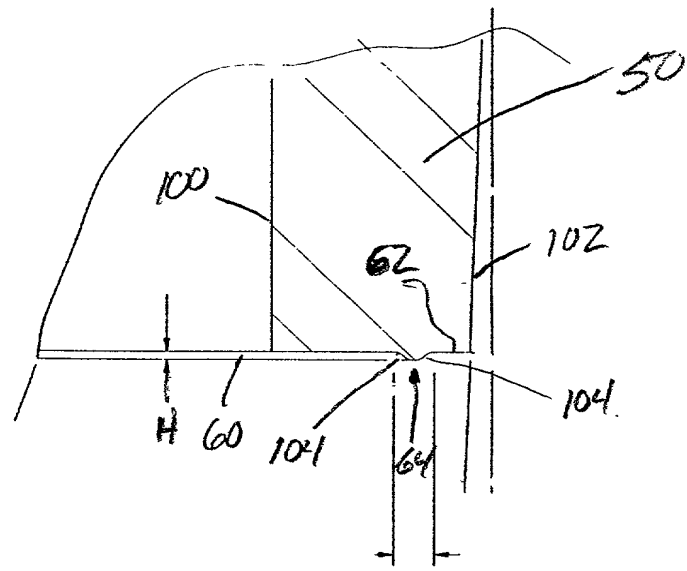


FIG. 5

2025 RELEASE UNDER E.O. 14176

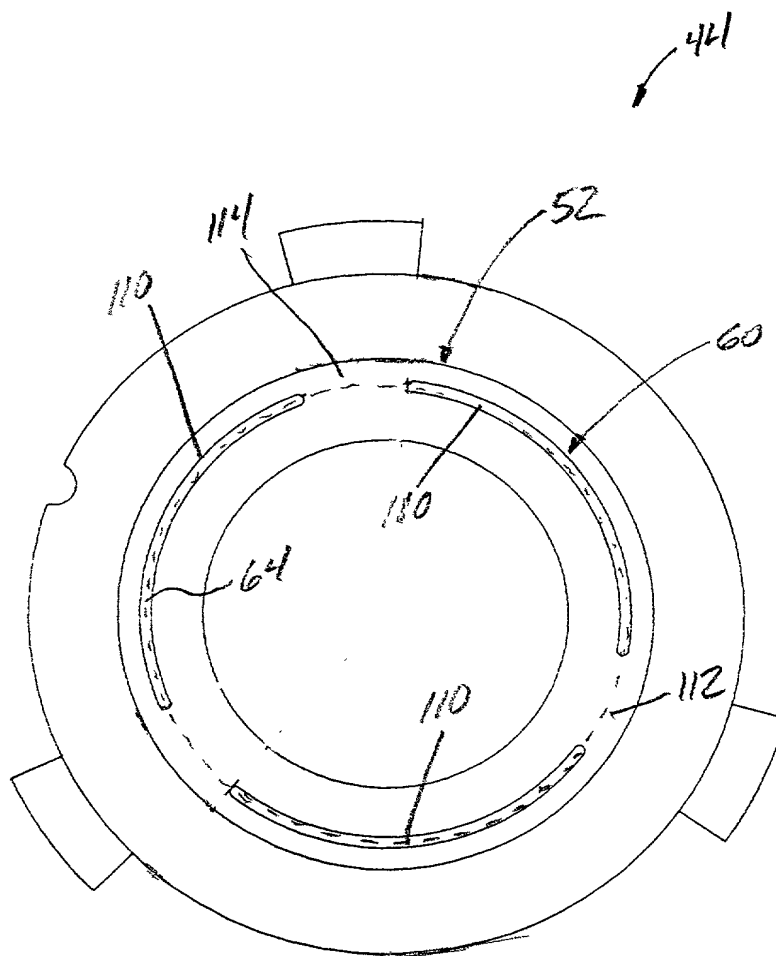


FIG. 6

DECLARATION AND POWER OF ATTORNEY	Attorney's Docket No. <b>9D-HL-19210</b>
-----------------------------------	---

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **WASHING MACHINE BRAKE CAM ACTUATOR WITH INTERRUPTED RING**, the specification of which:

(check one)    ☒ is attached hereto

☐ was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_,  
and was amended on \_\_\_\_\_.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations §1.56(a).

I hereby claim priority benefits under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112. I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

<u>Application Serial No.</u>	<u>Filing Date</u>	<u>Status(patented, pending, abandoned)</u>
_____	_____	_____
_____	_____	_____
_____	_____	_____

<p><b>POWER OF ATTORNEY:</b> As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (<i>list name and registration number</i>)</p> <p>H. Neil Houser, Reg. No. 28,859, General Electric Company, Appliance Park 2-225, Louisville, KY 40225</p>	
<p>Send Correspondence to:</p> <p>H. Neil Houser General Electric Company Appliance Park 2-225 Louisville, KY 40225</p>	<p>Direct Telephone Calls To:</p> <p>H. Neil Houser 502.452.4653</p>



DECLARATION AND POWER OF ATTORNEY

Attorney's Docket No.

9D-HL-19210

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application and any patent issued thereon.

SOLE OR FIRST INVENTOR:

Full Name: Emile E. Abi-Habib

Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Louisville, Kentucky

Citizenship: \_\_\_\_\_

Post Office Address: Louisville, Kentucky

SECOND JOINT INVENTOR, IF ANY:

Full Name: Steve Froelicher

Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Louisville, Kentucky

Citizenship: \_\_\_\_\_

Post Office Address: Louisville, Kentucky

THIRD JOINT INVENTOR, IF ANY:

Full Name: \_\_\_\_\_

Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: \_\_\_\_\_

Citizenship: \_\_\_\_\_

Post Office Address: \_\_\_\_\_

FOURTH JOINT INVENTOR, IF ANY:

Full Name: \_\_\_\_\_

Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: \_\_\_\_\_

Citizenship: \_\_\_\_\_

Post Office Address: \_\_\_\_\_